



APPLICATIONS

Fashion store, chain store, shopping mall;
Showrooms, art galleries, villas.

LED Down light luminaire with die-cast
Aluminum alloy in white powder coating finish.

SPECIFICATIONS

| | | |
|-----------------------|---|----------------------|
| NO OF HEAD | : | 1 |
| MOUNTING | : | Ceiling recessed |
| LAMP DESCRIPTION | : | 42W COB chip |
| COLOR TEMPERATURE | : | 2700/3000/4000/5000K |
| OPERATING VOLTAGE | : | 100-240V 50/60Hz |
| OPERATING TEMP. | : | -30°C + 40°C |
| ENVIRONMENTAL RATINGS | : | IP40 |

OPTICAL

| | | |
|--------------------|---|-----------------|
| OPTICS | : | Lens with glass |
| AIMING | : | Adjustable |
| LIGHT DISTRIBUTION | : | Symmetric |
| BEAM ANGLE | : | 15°/24°/38°/60° |

ELECTRICAL

| | | |
|----------------------|---|---------------------------------------|
| TRANSFORMER | : | To be ordered separately |
| TRANSFORMER MOUNTING | : | Remote |
| TRANSFORMER TYPE | : | Electronic AC100-240V 50/60Hz-DC700mA |
| EMERGENCY | : | NA |
| DIMMING | : | Non Dimmable, Dali, 1-10v, Triac |

PHYSICAL

| | | |
|---------------|---|---------------------------|
| DIMENSION | : | 142 mm x 153 mm (Ø130 mm) |
| BODY MATERIAL | : | Aluminum Alloy |
| BODY COLOR | : | Black, Silver, White |


PRODUCT SELECTION GUIDE

| PRODUCT | COLOR TEMP | POWER | OPTICS | DRIVER | BODY COLOR | REFLECTOR | ACCESSORIES |
|------------|------------|-------|----------|-----------------------|-------------|-------------|--------------------|
| HL 1060 42 | 2700 K | 42 W | 15- 15° | ND - Non-Dimmable | BL - Black | BL - Black | FG - Frosted glass |
| | 3000 K | | 24 - 24° | DA - DALI | SL - Silver | WH - White | CG - Clear glass |
| | 4000 K | | 38 - 38° | AN - Analogue (0-10v) | WH - White | XX - Custom | |
| | 5000 K | | 60 - 60° | TR - Triac | XX - Custom | | |

Ordering Code

HL 1060 42 - 2700 K - 42W - 15 - ND - BL - BL - FG

Consult factory / Representative for Custom Details

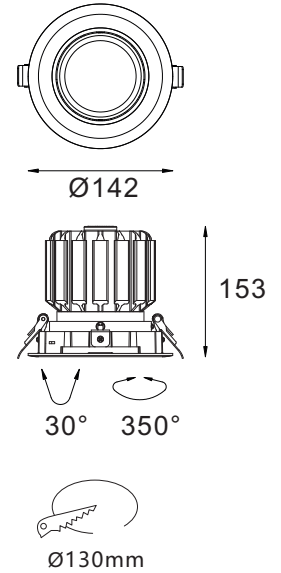

LUMINAIRE LUMEN

| | |
|------------------|------|
| ■ 2700 K /3150lm | Ra90 |
| ■ 3000 K /3360lm | Ra90 |
| ■ 4000 K /3570lm | Ra80 |
| ■ 5000 K /3780lm | Ra70 |

RoHS

CE

IP40