


## APPLICATIONS

Fashion store, chain store, shopping mall;  
Showrooms, art galleries.

LED Linear downlight with High pressure extruded aluminum construction. High transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions.

## SPECIFICATIONS

NO OF HEAD	:	1
MOUNTING	:	Suspended
LAMP DESCRIPTION	:	25W SMD chip
COLOR TEMPERATURE	:	3000/4000K
OPERATING VOLTAGE	:	100-240V 50/60Hz
OPERATING TEMP.	:	-30°C + 40°C
ENVIRONMENTAL RATINGS	:	IP40

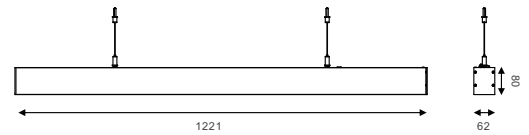

## OPTICAL

OPTICS	:	Glass
AIMING	:	Fixed
LIGHT DISTRIBUTION	:	Symmetric
BEAM ANGLE	:	Medium, Wide

## ELECTRICAL

TRANSFORMER	:	To be ordered separately
TRANSFORMER MOUNTING	:	Remote
TRANSFORMER TYPE	:	Electronic AC100-240V 50/60Hz - DC700mA
EMERGENCY	:	NA
DIMMING	:	Non Dimmable, Dali, 1-10v, Triac

## PHYSICAL

DIMENSION	:	1221 mm x 62 mm x 80 mm
BODY MATERIAL	:	Aluminum body
BODY COLOR	:	Black, Silver, White

## LUMINAIRE LUMEN

3000 K /2025lm	Ra90
4000 K /2125lm	Ra80

## PRODUCT SELECTION GUIDE

PRODUCT	COLOR TEMP	POWER	OPTICS	DRIVER	BODY COLOR	REFLECTOR	ACCESSORIES
HL 8001 25	3000 K	25W	M - Medium	ND - Non-Dimmable	BL - Black	BL - Black	XXX
	4000 K		W - Wide	DA - Dali	SL - Silver	WH - White	
			AN - Analogue (0-10v)	WH - White	XX - Custom		
			TR - Triac	XX - Custom			

Ordering Code

**HL 8001 25 - 3000 K - 25W - M - ND - BL - BL - XX**

Consult factory / Representative for Custom Details

**RoHS**



IP40