


APPLICATIONS

Fashion store, chain store, shopping mall;
Showrooms, art galleries.

LED Linear downlight with High pressure extruded aluminum construction. High transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions.

SPECIFICATIONS

NO OF HEAD	:	1
MOUNTING	:	Suspended
LAMP DESCRIPTION	:	80W SMD chip
COLOR TEMPERATURE	:	3000/4000K
OPERATING VOLTAGE	:	100-240V 50/60Hz
OPERATING TEMP.	:	-30°C + 40°C
ENVIRONMENTAL RATINGS	:	IP40

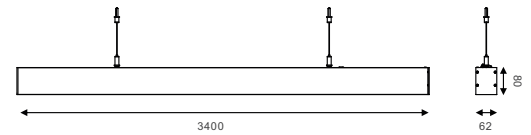

OPTICAL

OPTICS	:	Glass
AIMING	:	Fixed
LIGHT DISTRIBUTION	:	Symmetric
BEAM ANGLE	:	Medium, Wide

ELECTRICAL

TRANSFORMER	:	To be ordered separately
TRANSFORMER MOUNTING	:	Remote
TRANSFORMER TYPE	:	Electronic AC100-240V 50/60Hz
EMERGENCY	:	NA
DIMMING	:	Non Dimmable, Dali, 1-10v, Triac

PHYSICAL

DIMENSION	:	3400 mm x 62 mm x 80 mm
BODY MATERIAL	:	Aluminum body
BODY COLOR	:	Black, Silver, White

LUMINAIRE LUMEN

■ 2700 K /6000lm	Ra90
■ 3000 K /6400lm	Ra90
■ 4000 K /6800lm	Ra80
■ 5000 K /7200lm	Ra70

PRODUCT SELECTION GUIDE

PRODUCT	COLOR TEMP	POWER	OPTICS	DRIVER	BODY COLOR	REFLECTOR	ACCESSORIES
HL 8001 80	3000 K	80W	M - Medium	ND - Non-Dimmable	BL - Black	BL - Black	XXX
	4000 K		W - Wide	DA - Dali	SL - Silver	WH - White	
			AN - Analogue (0-10v)	WH - White	XX - Custom		
			TR - Triac	XX - Custom			

Ordering Code

HL 8001 80 - 3000 K - 80W - M - ND - BL - BL - XX

Consult factory / Representative for Custom Details

RoHS



IP40