

APPLICATIONS

Fashion store, chain store, shopping mall;
Showrooms, art galleries.


LED wallwasher Linear light with finland
Ledil top quality, High thermal conductive
aluminum body metal black surface coating.

SPECIFICATIONS

| | | |
|-----------------------|---|-------------------|
| NO OF HEAD | : | 1 |
| MOUNTING | : | Surface mounted |
| LAMP DESCRIPTION | : | 6 x 2.1W COB chip |
| COLOR TEMPERATURE | : | 2700K |
| OPERATING VOLTAGE | : | 100-240V 50/60Hz |
| OPERATING TEMP. | : | -30°C + 40°C |
| ENVIRONMENTAL RATINGS | : | IP40 |

OPTICAL

| | | |
|--------------------|---|----------------------|
| OPTICS | : | Lens |
| AIMING | : | Adjustable |
| LIGHT DISTRIBUTION | : | Symmetric |
| BEAM ANGLE | : | 7°/14°/25°/46°/9+41° |

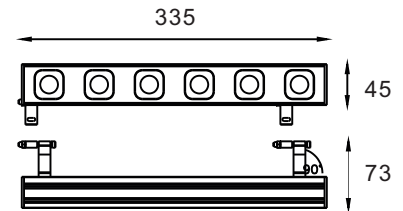

ELECTRICAL

| | | |
|----------------------|---|-----------------------------------------|
| TRANSFORMER | : | To be ordered seperately |
| TRANSFORMER MOUNTING | : | Remote |
| TRANSFORMER TYPE | : | Electronic AC100-240V 50/60Hz - DC700mA |
| EMERGENCY | : | NA |
| DIMMING | : | Non Dimmable, Dali, 1-10v, Triac |

PHYSICAL

| | | |
|---------------|---|------------------------|
| DIMENSION | : | 335 mm x 45 mm x 73 mm |
| BODY MATERIAL | : | Aluminum body |
| BODY COLOR | : | Black, Silver, White |

LUMINAIRE LUMEN

| | |
|------------------|------|
| ■ 2700 K /1200lm | Ra90 |
| ■ 3000 K /1280lm | Ra90 |
| ■ 4000 K /1360lm | Ra80 |
| ■ 5000 K /1440lm | Ra70 |

PRODUCT SELECTION GUIDE

| PRODUCT | COLOR TEMP | POWER | OPTICS | DRIVER | BODY COLOR | REFLECTOR | ACCESSORIES |
|------------|------------|-------|---------|-----------------------|-------------|-------------|-------------|
| HL 8005 16 | 2700 K | 16W | 7- 7° | ND - Non-Dimmable | BL - Black | BL - Black | XXX |
| | | | 14- 14° | DA - Dali | SL - Silver | WH - White | |
| | | | 25- 25° | AN - Analogue (0-10v) | WH - White | XX - Custom | |
| | | | 46- 46° | TR - Triac | XX - Custom | | |
| | | | 9+41° | | | | |

Ordering Code

HL 8005 16 - 2700 K - 16W - 7 - ND - BL - BL - XX

Consult factory / Representative for Custom Details

RoHS



IP40