




APPLICATIONS

Fashion store, chain store, shopping mall;
Showrooms, art galleries.

LED Linear downlight with High pressure extruded aluminum construction. High transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions.

SPECIFICATIONS

NO OF HEAD	:	1
MOUNTING	:	Suspended
LAMP DESCRIPTION	:	26W SMD chip
COLOR TEMPERATURE	:	2700/3000/4000/5000K
OPERATING VOLTAGE	:	100-240V 50/60Hz
OPERATING TEMP.	:	-30°C + 40°C
ENVIRONMENTAL RATINGS	:	IP40

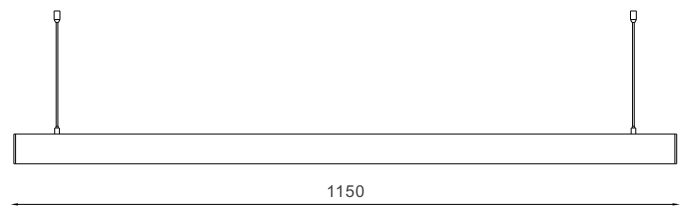

OPTICAL

OPTICS	:	Glass
AIMING	:	Fixed
LIGHT DISTRIBUTION	:	Symmetric
BEAM ANGLE	:	30°/60°/80°



ELECTRICAL

TRANSFORMER	:	To be ordered separately
TRANSFORMER MOUNTING	:	Remote
TRANSFORMER TYPE	:	Electronic AC100-240V 50/60Hz - DC600mA
EMERGENCY	:	NA
DIMMING	:	Non Dimmable, Dali, 1-10v, Triac

PHYSICAL

DIMENSION	:	1150 mm x 64 mm x 52 mm
BODY MATERIAL	:	Aluminum body
BODY COLOR	:	Black, Silver, White

LUMINAIRE LUMEN

■ 2700 K /1950lm	Ra90
■ 3000 K /2210lm	Ra90
■ 4000 K /2470lm	Ra80
■ 5000 K /2700lm	Ra70

PRODUCT SELECTION GUIDE

PRODUCT	COLOR TEMP	POWER	OPTICS	DRIVER	BODY COLOR	REFLECTOR	ACCESSORIES
HL 8028 26	2700 K	26W	30- 30°	ND - Non-Dimmable	BL - Black	BL - Black	XXX
	3000 K		60- 60°	DA - Dali	SL - Silver	WH - White	
	4000 K		80- 80°	AN - Analogue (0-10v)	WH - White	XX - Custom	
	5000 K		TR - Triac	XX - Custom			

Ordering Code

HL 8028 26 - 2700 K - 26W - 30 - ND - BL - BL - XX

Consult factory / Representative for Custom Details

RoHS



IP40